



#### www.latmet.com

SIA Lat Met: Reģ. Nr. LV 44103033222 «Meistari», Kocēnu novads, Kocēnu pagasts, Latvija, LV4227

Tālr. +371 642 29800; E-pasts: info@latmet.com



## INDUSTRIAL DOORS

Types: TLP, TL-FV, TLT






CFC free poliurethane

Type TLP

#### **Insulated industrial doors**



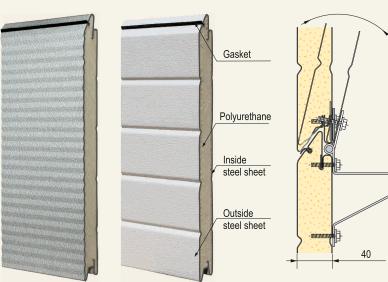

TLP industrial door of 40 mm thick, sandwich type insulated panels. Standard panel heights are 500 and 610 mm. Ribbed or wavy panel profile. Sections of this type can be used in the door up to 50 square meters. TLP door includes heavy duty tracks and door hardware. Torsion springs may be designed for 20 000, 50 000 or 100 000 cycles.



TLP industrial door is CE marked and meets the newest EN requirements. Tested and certified by "SP Provning Forskining" labs in Sweden.

# **Ordering measures** h - headroom H-opening height B-opening width garage deep


## **Lifting types**


Wide range of track systems makes Ryterna industrial door fit in buildings with all kinds of headroom sizes and configurations.




\*Custom track systems available on request.

#### www.latmet.com

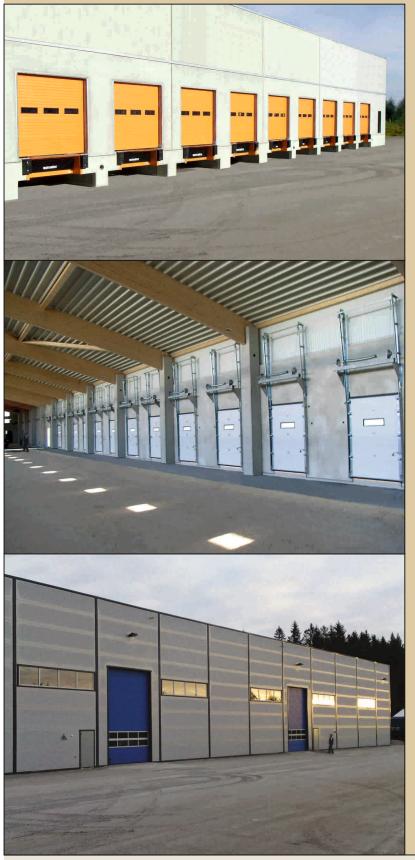

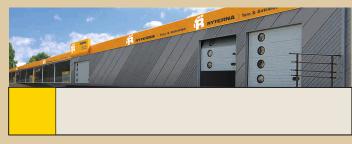



#### **Windows**

3 types of windows (round, oval and rectangular), or Full Vision panel may be installed into TLP door.

#### **Pass doors**

Standard pass door size is H 2000 mm x W 800 mm.


#### **Side doors**

Made to size to fit your sectional door.

i

Nonstandard window or pass door spacing solutions available under request.



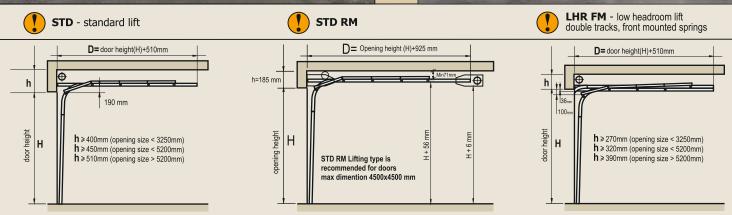







### **TL-Full View**


#### **Glazed Aluminum doors**




#### **Sections**

TL-FV door panels - anodized aluminum frames glazed with double acrylic glass, may be finished in different RAL colours.

White, sandwich type bottom panel is standard for TL-Full View doors.









**LHR RM** - low headroom lift double tracks, rear mounted springs




HL - high lift





VL - vertical lift




**VL** - vertical lift, low mounted springs















## Type **TLT**



5 mm 3 mm

TLT sectional door is designed for premises that require intensive ventilation, such as underground garages and carparks. Alu-frame with perforated, galvanized and coated steel sheets provides required air flow.





Wide range of panel patterns, colours and wood images are optional on TLP doors.

CASSETTE





RIB Golden Oak	RIB Old Oak	RIB Dark Oak	RIB Mahogany	MIDRIB RAL 9016	MIDRIB Golden Oak	MIDRIB Old Oak	MICRORIB RAL 9016	SLICK PLUS Golden Oak	SLICK PLUS Rusty	SLICK PLUS Stainles steel	

## **TLP door texture and colours**





Ribbed panel surface has standard "Stucco" pattern



Macrorib standard colour 9006



Painted RAL colours are available upon request

#### Standard colours (ribbed panels only)







## **TLP door accessories**





i Others panel surfaces are

available upon request.



Handle

Slide bolt Spring failure safety device (included)

**Options** 



Keyed Lock



Ventilation grid

**Door Operation Accessories** 



Chain Hoist



Electrical operator





Traffic lights









Cable brake

safety device





SIA Lat Met: Reg. Nr. LV 44103033222 «Meistari», Kocēni, Latvija, LV4227 Tālr. +371 642 29800; E-pasts: info@latmet.com www.latmet.com